



Specification Sheet

Input Volts	480				
Regulation					
Line Volts	±5%				
Lamp Watts	±10%				
Power Factor (min)	90%				
Input Watts	132 W				
NOM. Open Circuit Voltage	120 V				
Line Current (Amps)					
Operating	0.31				
Open Circuit	0.57				
Starting	0.28				
Recommended Fuse (Amps)	2				
Lamp Dropout Voltage (Line)	385 V				
UL Temperature Ratings					
Insulation Class	H (180°C)				
Temperature Code	E				
MIN. Starting Temperature	-40°F -40°C				
CAPACITOR Specifications					
Microfarads	10 uf				
Volts (min.)	280 V				
60Hz Test Procedures					
High Potential Test 1 Minute	2000 V				
High Potential Test 1 Second	2500 V				
Secondary Open Ckt Voltage (V)	110 - 135				
Secondary Current Shorted (A)	2.60 - 3.20				
Input Operating Current (A)	0.28 - 0.34				
Input Open Circuit Current (A)	0.29 - 0.82				
Input Short Circuit Current (A)	0.10 - 0.35				
Core and Coil Specifications					
Dimension A	2.00 in				
Dimension B	3.30 in				
Weight	6.0 lbs				
Lead Lengths (inches)	12-14				
Coil Material (Pri. / Sec.):	Cu / Cu				

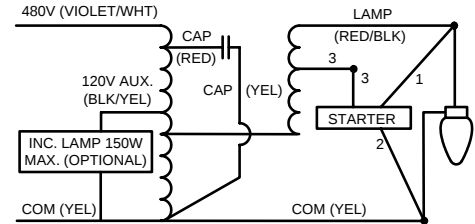

Optional 120V Standby Lamp 150 Watts Max.

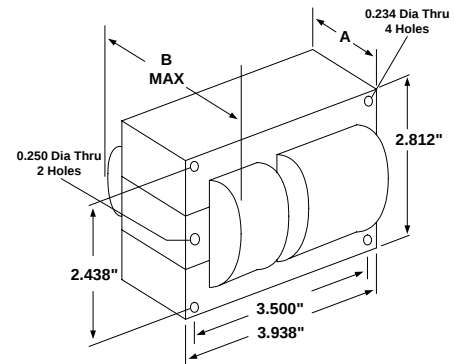



Reference Drawing

Capacitor: R17058517

Max Case Temp: 100 °C
Height: 2.83 in
Width / Diameter: 1.26 in

Ignitor: HPS150-3A

Max Case Temp 105 °C
BTL: 5 ft



Oil Cap. - P/N 005-1413-MF Consult Catalog for Specs.

Document #: 010-9754-02
Date: 10/6/2009
Status: Production
Replaces Catalog #: 12312-301R

A

Data is based upon tests performed by Universal Lighting Technologies in a controlled environment and is representative of relative performance. Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.

10/6/2009

Universal Lighting Technologies

26 Century Blvd. Suite 500 - Nashville, TN 37214

Phone 1-800-225-5278 Fax 1-800-206-0035

www.unvlt.com