
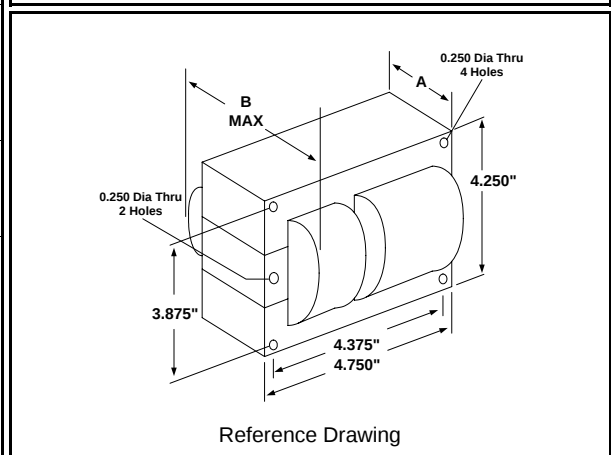
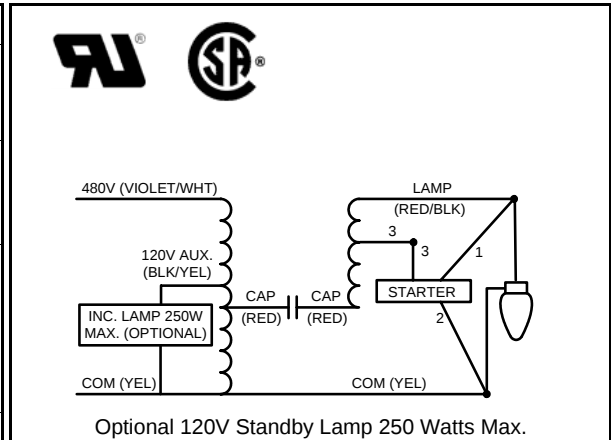



Specification Sheet

Input Volts	480				
Regulation					
Line Volts	±10%				
Lamp Watts	±10%				
Power Factor (min)	90%				
Input Watts	464 W				
NOM. Open Circuit Voltage	190 V				
Line Current (Amps)					
Operating	1.00				
Open Circuit	0.45				
Starting	0.80				
Recommended Fuse (Amps)	3				
Lamp Dropout Voltage (Line)	340 V				
UL Temperature Ratings					
Insulation Class	H (180°C)				
Temperature Code	D				
MIN. Starting Temperature	-40°F -40°C				
CAPACITOR Specifications					
Microfarads	55 uf				
Volts (min.)	240 V				
60Hz Test Procedures					
High Potential Test 1 Minute	2000 V				
High Potential Test 1 Second	2500 V				
Secondary Open Ckt Voltage (V)	170 - 210				
Secondary Current Shorted (A)	6.00 - 7.45				
Input Operating Current (A)	0.90 - 1.10				
Input Open Circuit Current (A)	0.20 - 0.65				
Input Short Circuit Current (A)	0.50 - 0.90				
Core and Coil Specifications					
Dimension A	2.32 in				
Dimension B	4.10 in				
Weight	14.0 lbs				
Lead Lengths (inches)	12-14				
Coil Material (Pri. / Sec.):	Cu / Cu				



Capacitor: R17058507	Ignitor: HPS400-3A
Max Case Temp: 100 °C	Max Case Temp 105 °C
Height: 3.74 in	BTL: 10 ft
Width / Diameter: 1.77 in	

Oil Cap. - P/N 005-1594-MF Consult Catalog for Specs.

Data is based upon tests performed by Universal Lighting Technologies in a controlled environment and is representative of relative performance. Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.